


Glass Fibre Flagpoles Flagpole Fittings

Internal Halyard with cover and key

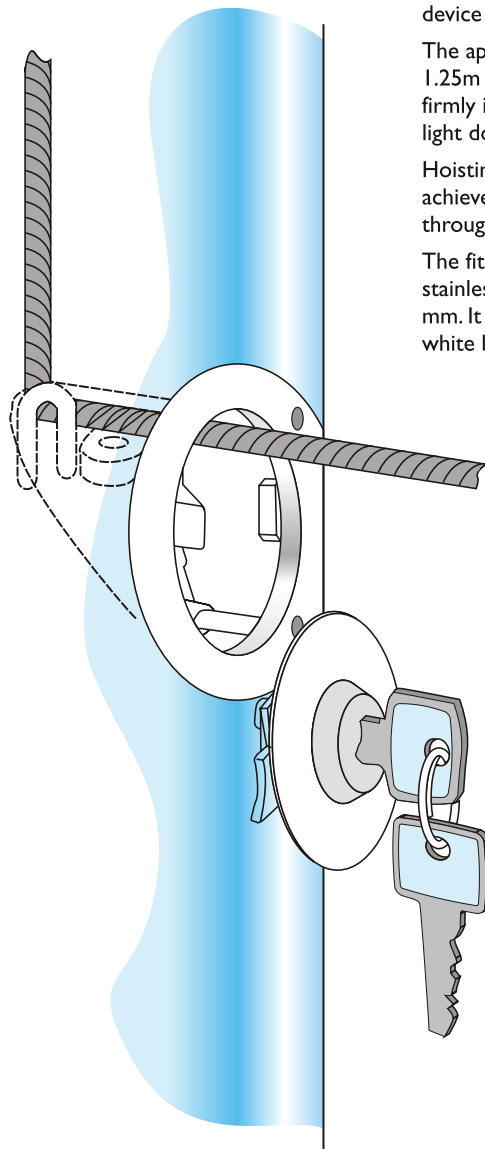

A steel aperture fitting containing a ratchet clamp and halyard control device protected by a locked cover.

The aperture is fitted into the pole 1.25m from the base. The halyard is held firmly in the clamp but released by a light downward jerk.

Hoisting and lowering of the flag is achieved by control of the halyard through the aperture.

The fitting is made of white-coated stainless steel and has a diameter of 50 mm. It is fixed to the flagpole with four white blind rivets.